

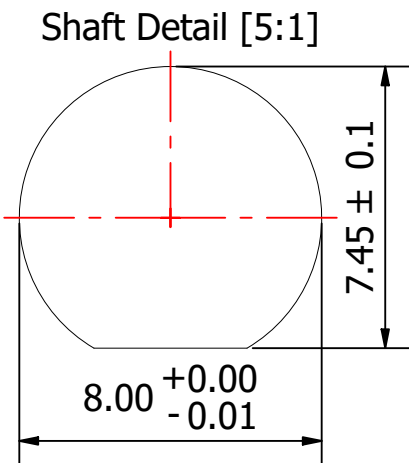
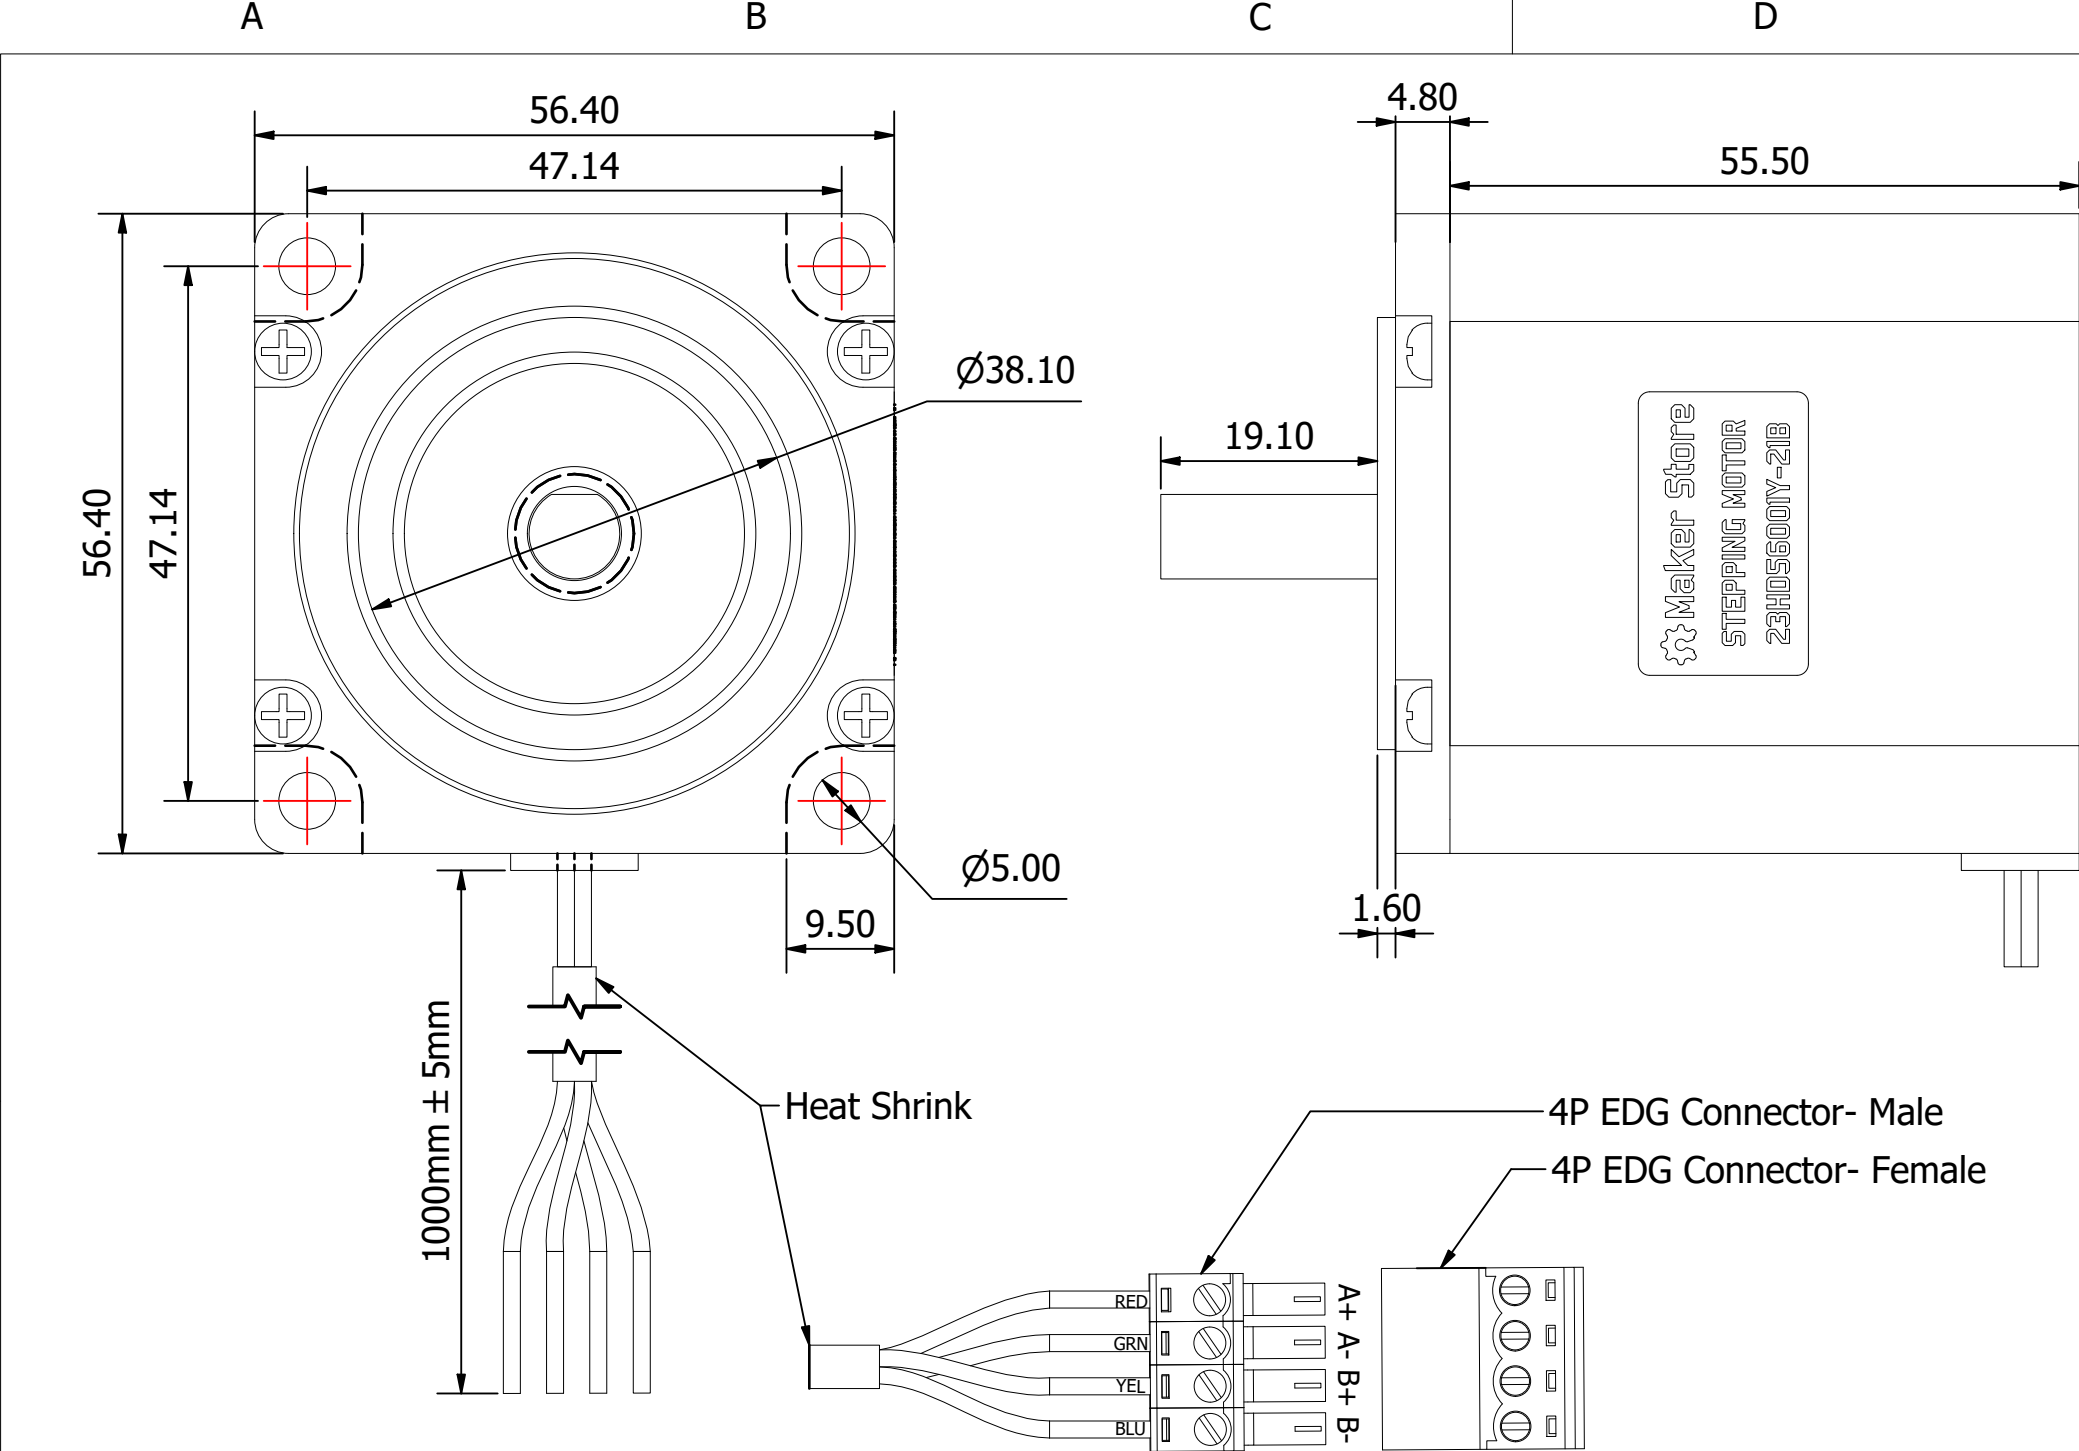


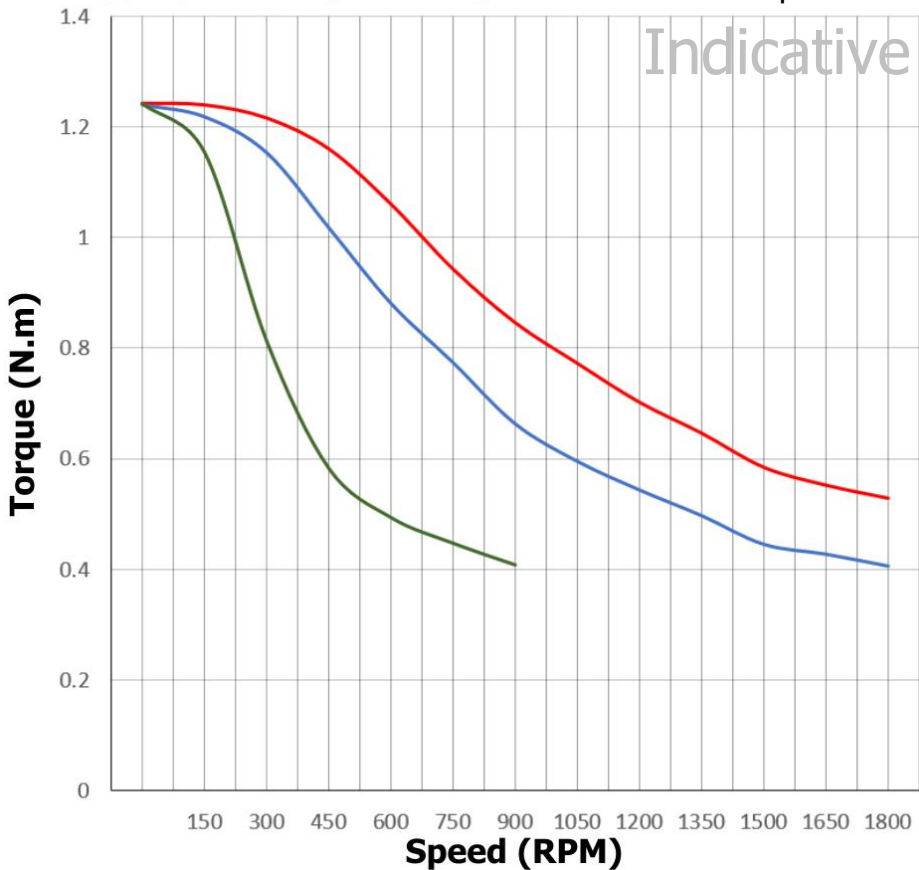

Operating Voltage @ 1.7A Current Stepper Driver: DM542
— 36VDC — 24VDC — 12VDC Micro Step: 800

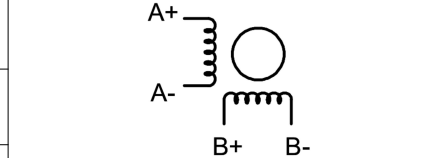

GENERAL SPECIFICATIONS		ELECTRICAL SPECIFICATIONS		 Wiring Sequence	
Step Angle	1.8° ± 5%	Poles	Bipolar		
Rotor Inertia	280 g.cm ²	Rated Voltage	2.76V DC	A+	RED
Holding Torque	1.26 N.m	Rated Current	2.3A	A-	GREEN
Detent Torque	45 mN.m	Insulation Resistance	100 MΩ/min	B+	YELLOW
Mass	0.72 kg	Insulation Class	B	B-	BLUE
Ambient Op. Temp.	-10° - 50°C	Resistance per Phase	1.2 Ω ± 10%	Exciting Sequence	
Max Op. Temp.	80°C	Inductance per Phase	2.3mH ± 20%		
				STEP	A
				1	+
				2	-
				3	-
				4	+

SKU	ELEC-NEMA23-8-126NM Datasheet	VER: 1.0
DESC.	Nema23 8.00mm Shaft 1.26N.m Stepper Motor Data Sheet	TEC

