


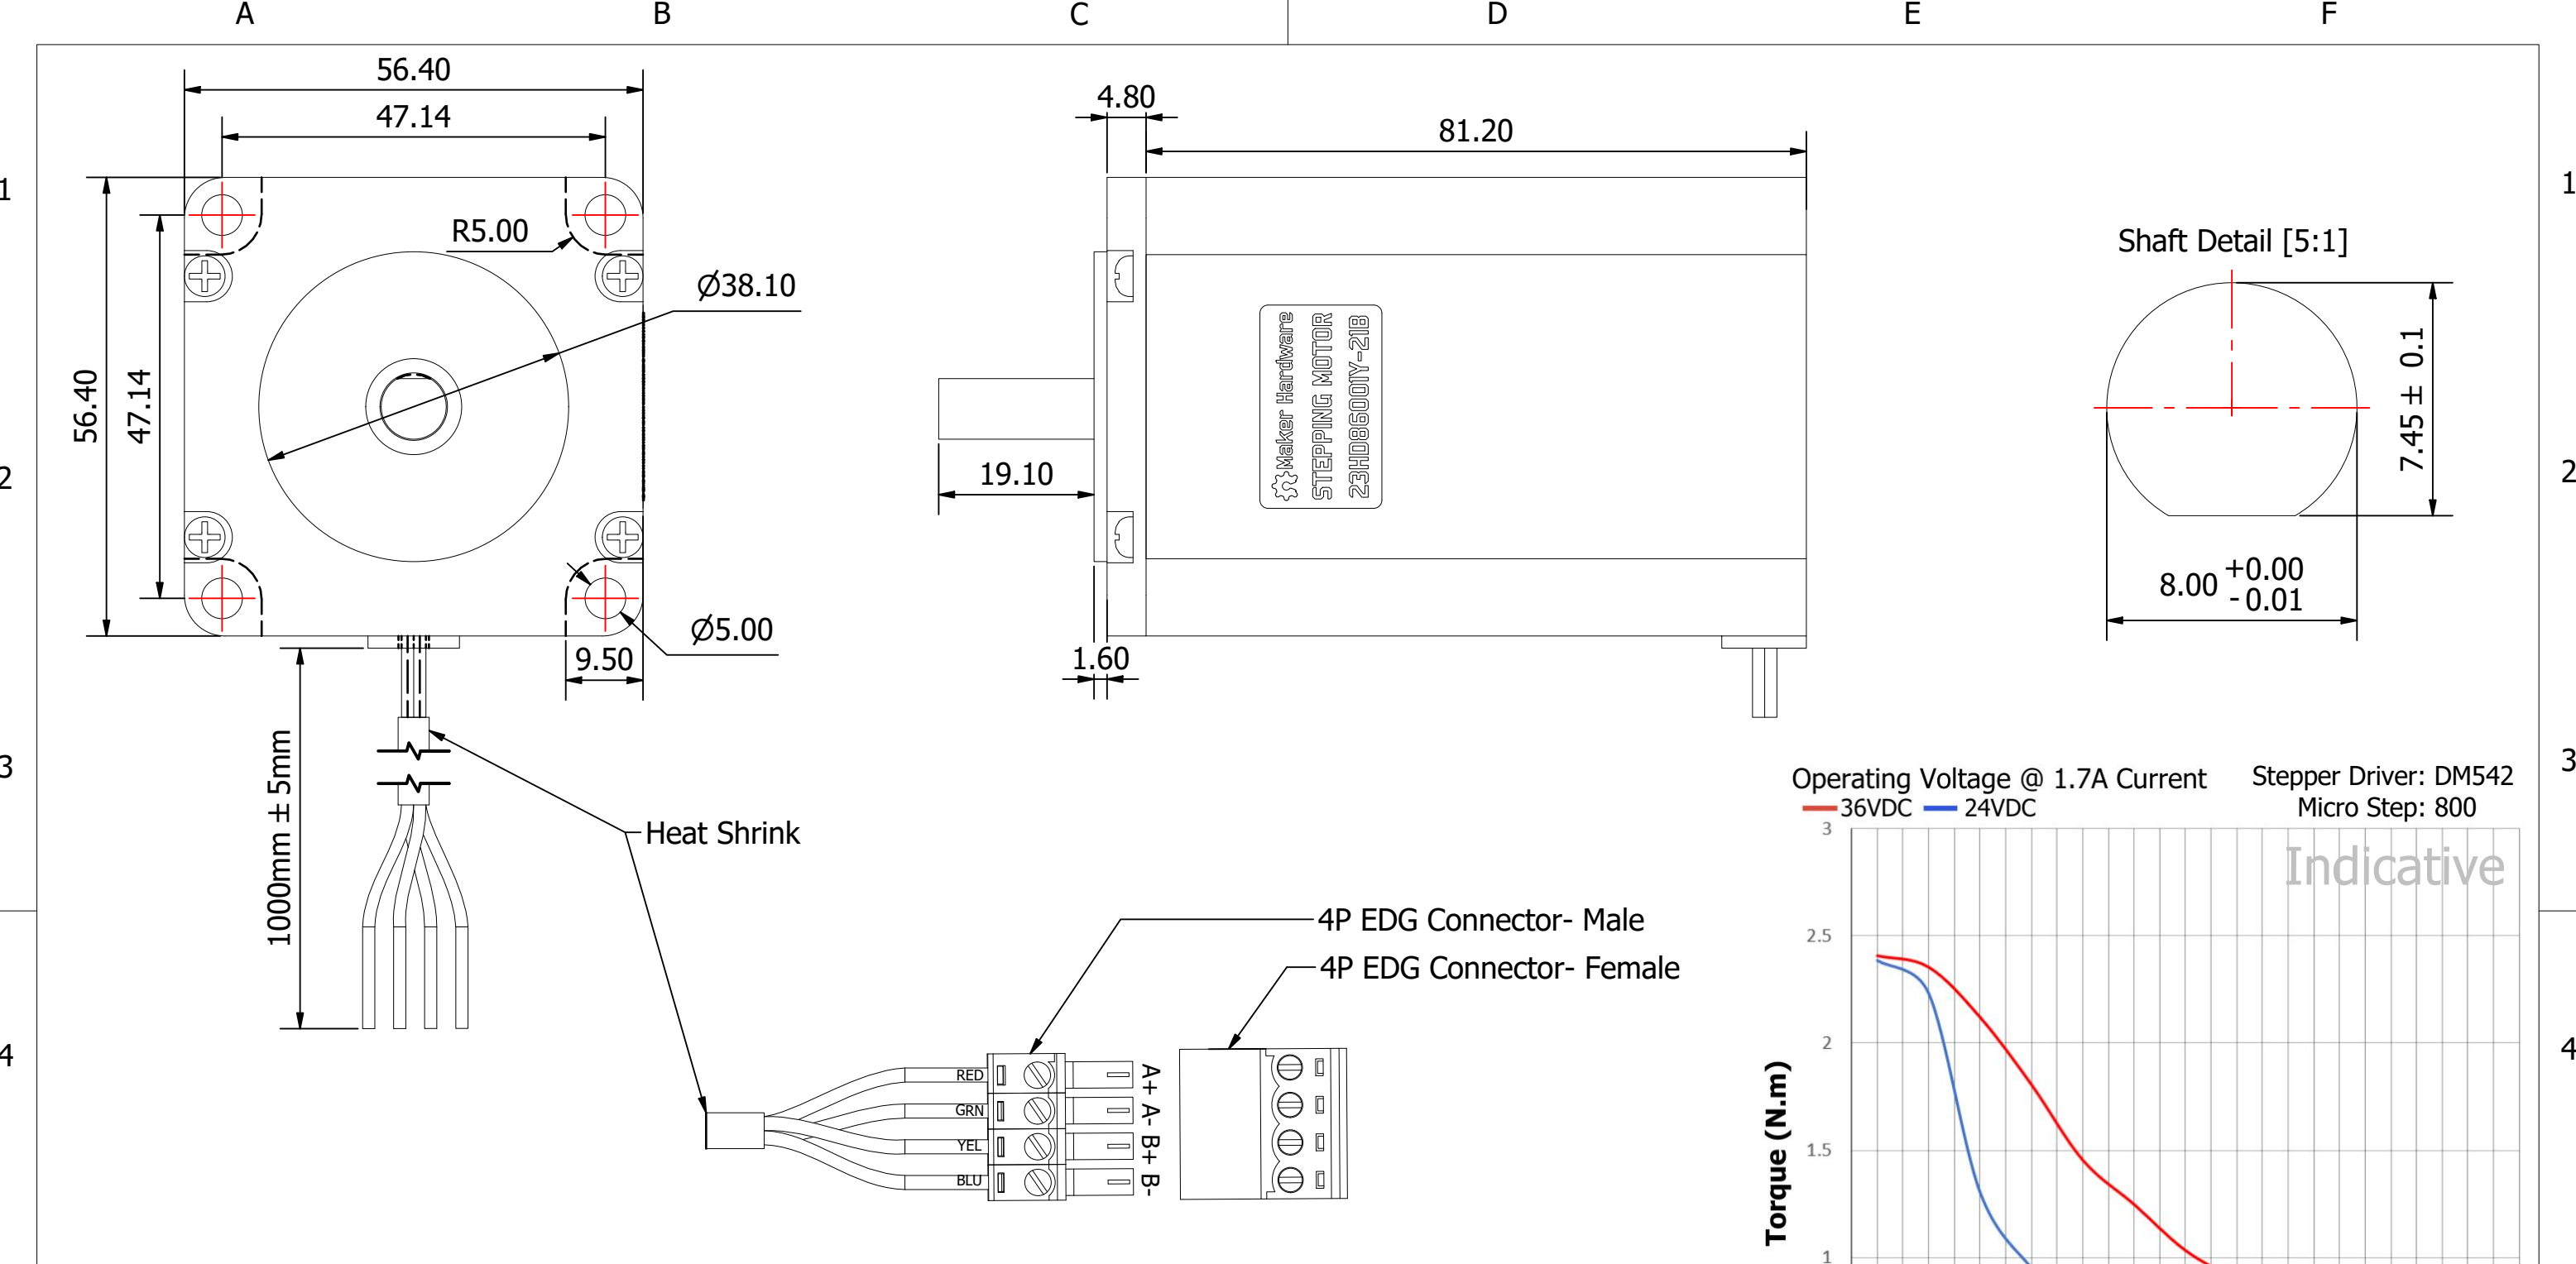

GENERAL SPECIFICATIONS		ELECTRICAL SPECIFICATIONS	
Step Angle	1.8° ± 5%	Poles	Bipolar
Rotor Inertia	550 g.cm²	Rated Voltage	3.6V DC
Holding Torque	2.45 N.m	Rated Current	3A
Detent Torque	82 mN.m	Insulation Resistance	100 MΩ/min
Mass	1.2 kg	Insulation Class	B
Ambient Op. Temp.	-10° - 50°C	Resistance per Phase	1.2 Ω ± 10%
Max Op. Temp.	80°C	Inductance per Phase	4.3mH ± 20%

Wiring Sequence

A+	RED	B+	YELLOW
A-	GREEN	B-	BLUE

Exciting Sequence

STEP	A	B	C	D
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

CW CCW

